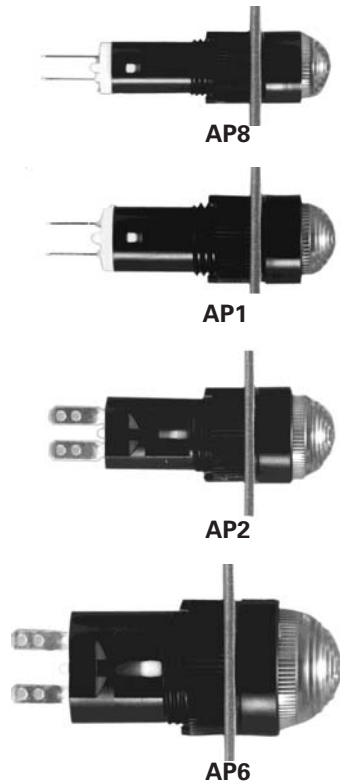



AP Series — Miniature Pilot Lights

Miniature Pilot Lights with Super Bright LEDs

Key features of AP series include:

- Long service life, low maintenance
- Space saving miniature style
- Dome or flat lens models
- Built-in current-limiting resistor and reverse polarity protection diode
- Five illumination colors: red, green, amber, yellow, and white
- AC adaptor (120V AC and 240V AC) and DC-DC Converter (110V DC) options on 12mm and 16mm units


A

Switches & Pilot Devices

Specifications	Lamp	Built-in LED with current limiting resistor
	Operational Voltage	6, 12, 24VDC (full voltage), 110/120, 220/240VAC, (transformer) 110VDC (with converter)
	Current Ratings	AP8: 6VDC/18mA, 12VDC/18mA, 24VDC/12mA AP1: 6VDC/18mA, 12VDC/18mA, 24VDC/12mA AP2: 6VDC/33mA, 12VDC/22mA, 24VDC/11mA AP6: 6VDC/33mA, 12VDC/22mA, 24VDC/11mA
	Operating Temp.	-20°C to +50°C
	Operating Humidity	45 to 85% RH
	Insul. Resistance	100MΩ min. (500V DC megger) Between live and dead parts
	Rev. Withstand Voltage	AP2: 100V Other Series: 200V
	Solder Terminal	Soldering 260°C maximum (5 sec.)
	Degree of Protection	AP8: IP40 (dustproof) Other Series: IP65 (oiltight)





Optional Adaptors/Converters		AC Adaptor	DC-DC Converter
	Applicable Units	AP2 & AP6 (with 6V LED only)	
	Operating Voltage	110/120VAC 50/60 Hz 220/240VAC 50/60 Hz	110V DC (90 to 140V DC)
	Power Consumption	1.6 VA maximum	1W maximum
	Insulation Voltage	250 V AC	140V DC
	Insulation Resistance	10MΩ min. (500V DC megger) Between live and dead parts	
	Dielectric Strength	2,000V AC, 1 minute Between live/dead parts 2,000V AC, 1 minute Between terminals	2,000V AC, 1 minute Between live/dead parts 1,500V AC, 1 minute Between terminals



Available as one piece only (LEDs are not available).

Miniature Pilot Lights (Assembled)

Part Numbers: AP Miniature Pilot Lights


Appearance	Lens Style	Operating Voltage	Part Numbers
AP8 Series - Ø 8mm 	Dome	6V DC +/- 5% 12V DC +/- 10% 24V DC +/- 10%	AP8M266-② AP8M211-② AP8M222-②
	Flat	6V DC +/- 5% 12V DC +/- 10% 24V DC +/- 10%	AP8M166-② AP8M111-② AP8M122-②
AP1 Series - Ø 10mm 	Dome	6V DC +/- 5% 12V DC +/- 10% 24V DC +/- 10%	AP1M266-② AP1M211-② AP1M222-②
	Flat	6V DC +/- 5% 12V DC +/- 10% 24V DC +/- 10%	AP1M166-② AP1M111-② AP1M122-②
AP2 Series - Ø 12mm 	Dome	6V DC +/- 5% 12V DC +/- 10% 24V DC +/- 10%	AP2M266-② AP2M211-② AP2M222-②
	Flat	6V DC +/- 5% 12V DC +/- 10% 24V DC +/- 10%	AP2M166-② AP2M111-② AP2M122-②
AP6 Series - Ø 6mm 	Dome	6V DC +/- 5% 12V DC +/- 10% 24V DC +/- 10%	AP6M266-② AP6M211-② AP6M222-②
	Flat	6V DC +/- 5% 12V DC +/- 10% 24V DC +/- 10%	AP6M166-② AP6M111-② AP6M122-②

② Color Code

Color	Code
Amber	A
Green	G
Red	R
White	W
Yellow	Y

- 1. In place of ②, specify the color code.
- 2. For dimensions, see page A-33
- 3. For accessories, see page A-33.





Part Numbers: Optional AC Adaptors and DC-DC Converters (for AP2 and AP6 only)

Appearance	Style	Voltage	Part Numbers	
			Used with AP2 Series	Used with AP6 Series
	AC Adaptor	110/120V AC 220/240V AC	AP2-0126D AP2-0246D	AP6-0126D AP6-0246D
	DC-DC Converter	110V DC (90-140V DC)	AP2-016DD	AP6-016DD

Secondary Voltage = 6V

- 1. Optional AC adaptors and DC-DC converters snap onto the back of AP2 or AP6 pilot lights.
- 2. AC Adaptors and DC-DC Converters step down to 6V.
- 3. For dimensions, see page A-28.

Accessories — AP Series

Appearance	Description	Used With	Part Number
Locking Ring Wrench 	Made of metal. Used for tightening plastic locking ring during installation. Tightening torque should not exceed 3kgf-cm	Ø 16mm units	MT-001
		Ø 12mm units	MT-002
		Ø 10mm units	MT-003
		Ø 8mm units	MT-004
Mounting Hole Plug 	Made of rubber. Fills unused mounting holes to provide IP65 protection	Unused 8mm panel cutouts	AL-B8
		Unused 10mm panel cutouts	AL-B1
		Unused 12mm panel cutouts	AL-B2
		Unused 16mm panel cutouts	AL-B6
Transformer Removal Tool		AP2 & AP6 snap on transformer & DC-DC converter	MT-100
Replacement Lenses 	Lenses (included with all units).	AP1M Flat	AP1M-L1-②
		AP1M Dome	AP1M-L2-②
		AP2M Flat	AP2M-L1-②
		AP2M Dome	AP2M-L2-②
		AP6M Flat	AP6M-L1-②
		AP6M Dome	AP6M-L2-②
Replacement Engraving Inserts 	Allow legends under flat lenses (included with all flat lens models).	AP1M Flat	AP1M-P1-W
		AP2M Flat	AP2M-P1-W
		AP6M Flat	AP6M-P1-W

A
Switches & Pilot Devices


In place of ②, specify the Lens Color Code.

② Lens Color Code


Color	Code
Amber	A
Green	G
Red	R
White	W
Yellow	Y

Dimensions — AP Series

Pilot Lights (AP Series)

Style	AP8		AP1		AP2			AP6		
	Flat	Dome	Flat	Dome	Flat	Dome	w/ Adaptor or Converter	Flat	Dome	w/ Adaptor or Converter
Panel Cut-out	Ø 0.319" (+0.0118, -0) 8.1mm (+0.3, -0)		Ø 0.398" (+0.0118, -0) 10.1mm (+0.3, -0)		Ø 0.480" (+0.0118, -0) 12.2mm (+0.3, -0)			Ø 0.638" (+0.0118, -0) 16.2mm (+0.3, -0)		
F Outside Dimension	Ø 0.386" (9.8mm)		Ø 0.472" (12mm)		Ø 0.551" (14mm)		□ 0.709" (18mm)	Ø 0.709" (18mm)		□ 0.709" (18mm)

Dimensions — AP Series con't

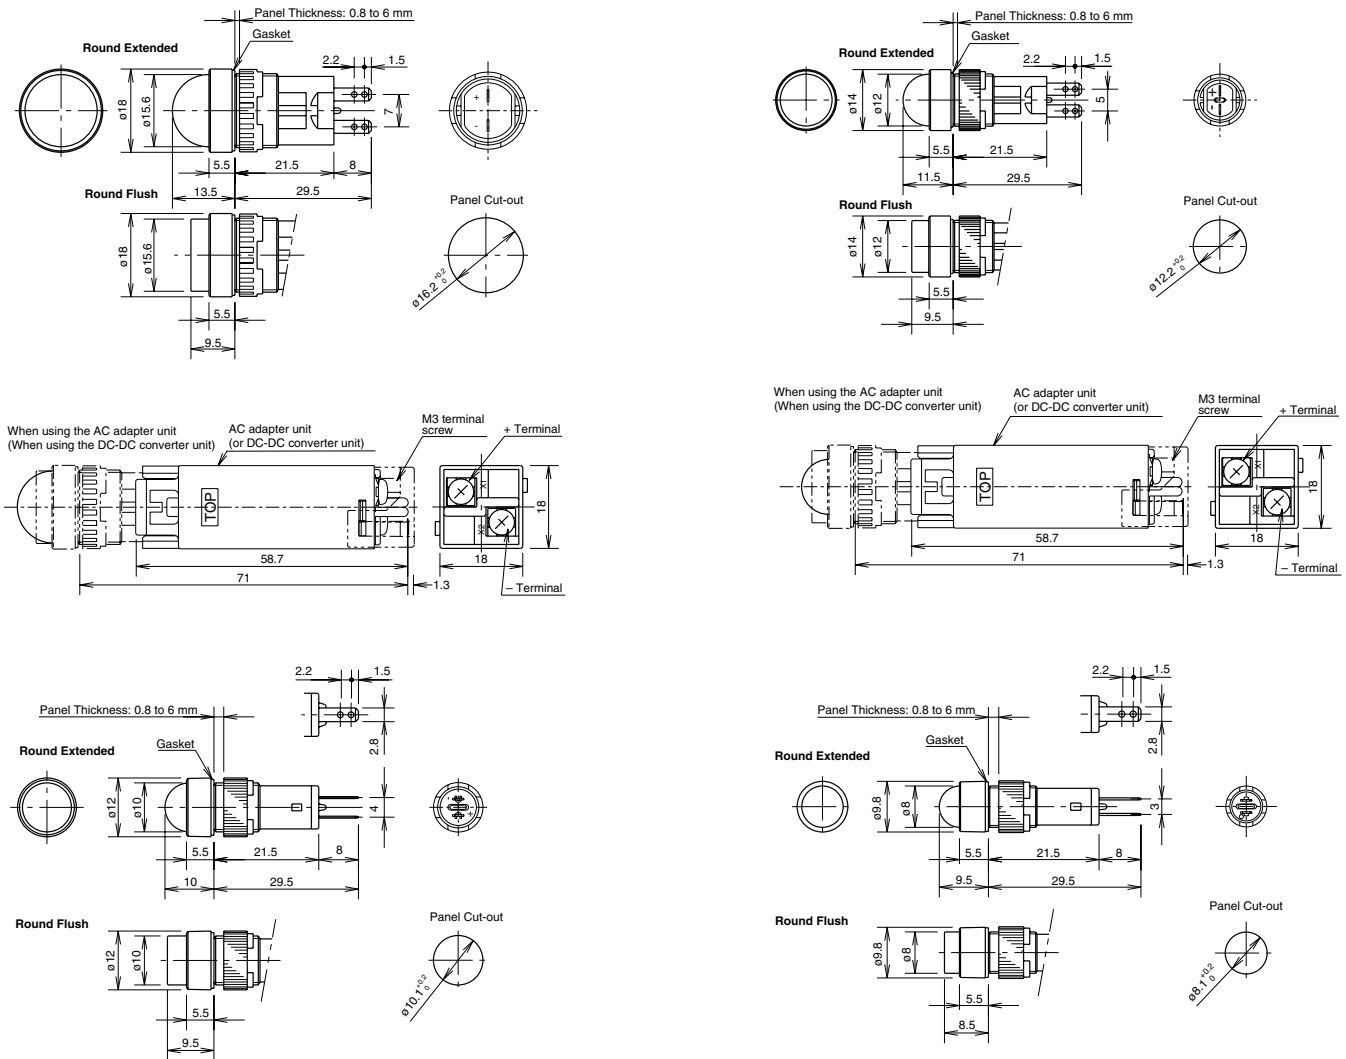

Solder/Tab Terminal Type

